



The Brocade SilkWorm 4900 Fibre Channel switch combines up to 64 ports of 4 Gbit/sec performance with high availability and Ports on Demand flexibility to support mission-critical SANs.

## SILKWORM 4900

### Highlights

- Provides up to 64 ports in a single domain and a 2U enclosure, facilitating more easily managed SAN fabrics with fewer domains
- Utilizes Ports on Demand capabilities for fast, easy, and cost-effective scalability from 32 to 64 ports in 16-port increments
- Enables switch consolidation through its high port count—increasing utilization, lowering management expenses, and reducing fabric complexity
- Protects existing investments and offers an upgrade path to support earlier 1 and 2 Gbit/sec devices
- Supports full 4 Gbit/sec operations at distances up to 100 kilometers (or 500 kilometers at 1 Gbit/sec) for cost-effective business continuance
- Increases network performance with enhanced Brocade ISL Trunking, which enables a high-speed data path up to 32 Gbit/sec
- Meets high-availability requirements with redundant, hot-pluggable components, non-disruptive software upgrades, and hot code activation

### Large SAN Capabilities in a Small Space

The Brocade® SilkWorm® 4900 is a high-performance, high-availability Fibre Channel switch that provides high port density for addressing mission-critical storage requirements. With a flexible architecture that supports 1, 2, and 4 Gbit/sec technology with 32, 48, or 64 ports, the SilkWorm 4900 provides an affordable high-port-count, single-domain solution. As a result, organizations with large Storage Area Network (SAN) requirements can reduce the size of their SAN footprint and simplify management by lowering the total number of domains.

The SilkWorm 4900 also provides “pay-as-you-grow” scalability through flexible Ports on Demand capabilities. Because it is fully compatible with previous 1 and 2 Gbit/sec devices, the SilkWorm 4900 protects existing technology investments while providing a strategic solution for the future.

These capabilities help make the SilkWorm 4900 ideal for departments in large enterprises and midsized organizations. It can be used as a port-dense core switch or a high-connectivity edge switch in SANs ranging from small deployments to larger core-to-edge SAN infrastructures that support enterprise-class applications such as ERP, MRP, data warehousing, and e-mail.

#### INDUSTRY-LEADING PERFORMANCE

To support the most demanding business applications, the SilkWorm 4900 provides best-in-class performance for midrange SAN switches. It features a non-blocking architecture with as many as 64 ports concurrently active at 4 Gbit/sec full duplex to provide an aggregate bandwidth of 512 Gbit/sec.

# HIGH PERFORMANCE

The SilkWorm 4900 utilizes Brocade fifth-generation ASIC technology featuring eight 8-port groups. As a result, an Inter-Switch Link (ISL) trunk can have up to eight ports supplying as much as 32 Gbit/sec of data throughput. In addition to reducing congestion between switches and providing greater total bandwidth, enhanced ISL Trunking utilizes ISLs more efficiently to free up the number of usable switch ports (see Figure 1).

Flexible SAN deployment advantages include the following:

- A high-port-count, high-availability switch is an ideal SAN core solution when requirements include limiting the cost and complexity of the SAN.
- Enterprise-class SANs built with a core-to-edge topology feature highly redundant configurations requiring the use of many ports for ISLs to provide a failover capability. The SilkWorm 4900 provides more usable ports in a large core-to-edge design by requiring fewer switches overall, and thus fewer ports dedicated to ISLs.

#### ENTERPRISE-CLASS AVAILABILITY FOR BUSINESS CONTINUANCE

With enterprise-class availability features such as hot-swappable redundant fans and power supplies, the SilkWorm 4900 provides a reliable foundation for disaster recovery and business continuance. Moreover, hot code activation helps maximize application uptime with faster system upgrades and maintenance that reduce the dependency on scheduled outages.

Combined with a wide range of Brocade diagnostic and monitoring functions, these capabilities help provide a high-availability SAN environment.


To support disaster recovery and business continuance operations, the SilkWorm 4900 enables connectivity distances up to 500 kilometers at 1 Gbit/sec and 100 kilometers at 4 Gbit/sec. This capability facilitates the deployment of high-performance, long-distance SAN solutions such as data center consolidation and disaster recovery.

#### HIGH SCALABILITY WITH PORTS ON DEMAND

Delivering up to 64 ports in a single domain, the SilkWorm 4900 combines the cost-effectiveness of a switch designed for high-port-count requirements with highly scalable Ports on Demand capabilities. It comes with a minimum of 32 ports enabled, and organizations can easily expand the number of ports to 48 or 64 by activating a license as their requirements change. Because the SilkWorm 4900 is easily upgradable, it extends the Brocade modular “pay-as-you-grow” approach to support cost-effective business growth.

#### SUPERIOR ROI AND INVESTMENT PROTECTION

The SilkWorm 4900 combines strategic performance, availability, and scalability advantages with investment protection for existing SAN environments. For instance, auto-sensing capabilities for 1, 2, and 4 Gbit/sec ports enable rapid implementation in existing SAN environments—reducing both deployment cost and complexity.

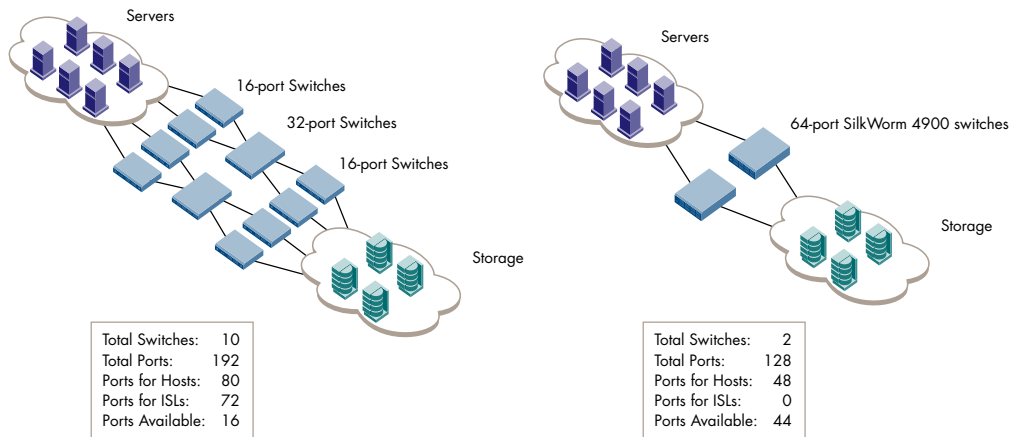

**Figure 1.** Simplified SAN deployments supporting greater device attachment.

The SilkWorm 4900 utilizes the same Brocade Fabric OS® code stream that supports the SilkWorm product line—from the base 8-port SilkWorm 200E to the 256-port SilkWorm 48000. This helps ensure full forward and backward compatibility among SilkWorm switches while simplifying software maintenance and field upgrades. As a result, the SilkWorm 4900 enables organizations to better leverage their current training, tools, devices, and processes.

#### OPEN SAN MANAGEMENT

By networking Fibre Channel switches such as the SilkWorm 4900 under a common platform, Fabric OS greatly simplifies SAN management. An embedded real-time operating system, Fabric OS includes standard management interfaces, a full range of management tools, and support for third-party SAN management applications.

To simplify SAN administration and reduce costs, the SilkWorm 4900 supports switch management through a command line interface, Brocade Web Tools, and Brocade Fabric Manager. It also leverages Brocade Advanced Fabric Services to improve the utilization of existing

storage and server assets, increase administrator efficiency, and lower the cost of storage management.

To facilitate deployment, the SilkWorm 4900 integrates easily into heterogeneous environments such as AIX, Linux, Solaris, UNIX, and Windows NT.

#### HIGHER FABRIC SECURITY FOR CRITICAL INFORMATION

To help organizations safeguard their critical information, the SilkWorm 4900 is designed for the highest levels of SAN fabric security. It utilizes Brocade Zoning, Advanced Zoning, and Secure Fabric OS® to help organizations simplify administration and significantly increase their control over data access.

#### MAXIMIZING SAN INVESTMENTS

Brocade and its partners offer complete SAN solutions to meet a wide range of technology and business requirements. These solutions include education and training, support, service, and professional services to help optimize SAN investments. For more information, contact an authorized Brocade sales partner or visit [www.brocade.com](http://www.brocade.com).

# SILKWORM 4900

## SILKWORM 4900 SPECIFICATIONS

### Systems Architecture

|                            |  |
|----------------------------|--|
| <b>Fibre Channel ports</b> | 64 ports, universal (E, F, and FL)   |
| <b>Scalability</b>         | Full fabric architecture with 239 switches maximum   |
| <b>Certified maximum</b>   | 56 switches, 7 hops; larger fabrics may be certified as required   |
| <b>Interoperability</b>    | SilkWorm 2000, 3000, 200E, and 4000 series switches; SilkWorm 12000, 24000, and 48000 directors; SilkWorm Multiprotocol Router   |
| <b>Performance</b>         | 1.063 Gbit/sec line speed, full duplex; 2.125 Gbit/sec line speed, full duplex; 4.25 Gbit/sec line speed, full duplex and auto-sensing of 1, 2, and 4 Gbit/sec port speeds; optionally programmable to fixed port speed; speed matching between 1, 2, and 4 Gbit/sec ports                       |
| <b>ISL Trunking</b>        | Up to eight 4 Gbit/sec ports per ISL trunk; up to 32 Gbit/sec per ISL trunk  |
| <b>Aggregate bandwidth</b> | 512 Gbit/sec end to end  |
| <b>Fabric latency</b>      | ~700 nanoseconds within a locally switched group and <2.4 µsec with no contention, cut-through routing at 4 Gbit/sec between locally switched groups   |
| <b>Maximum frame size</b>  | 2112-byte payload  |
| <b>Classes of service</b>  | Class 2, Class 3, Class F (inter-switch frames)  |
| <b>Port types</b>          | FL_Port, F_Port, and E_Port; self-discovery based on switch type (U_Port)  |
| <b>Data traffic types</b>  | Fabric switches supporting unicast and broadcast   |
| <b>Media types</b>         | Small Form-factor Pluggable (SFP) media; short-wave up to 500 meters (1 640 feet); long-wave up to 10 kilometers (6.2 miles); extended long-wave up to 100 km (62.1 miles). Distance depends on fiber optic cable and port speed.  |
| <b>Fabric services</b>     | Simple Name Server; Registered State Change Notification (RSCN).<br><i>Optional fabric services include:</i><br>Brocade Advanced Zoning, Brocade Fabric Watch, Brocade Extended Fabrics, Brocade Remote Switch, Brocade ISL Trunking, Brocade Advanced Performance Monitoring, Brocade Web Tools |
| <b>Options</b>             | SFP media  |

### Management

|                                      |  |
|--------------------------------------|--|
| <b>Management software supported</b> | Telnet; SNMP (FE MIB, FC Management MIB); Brocade Advanced Web Tools (optional); Brocade Fabric Manager (optional) |
| <b>Management access</b>             | 10/100 Ethernet port (RJ-45); Serial port (RJ-45); In-band through Management Server                               |
| <b>Diagnostics</b>                   | POST and embedded online/offline diagnostics   |

### Mechanicals

|                      |  |
|----------------------|--|
| <b>Enclosure</b>     | Non-port side to port side (port side exhaust); back-to-front airflow; power from rear; 2.OU, 19-in. EIA-compliant |
| <b>Size</b>          | Width: 42.87 cm (16.88 in)<br>Height: 8.60 cm (3.39 in)<br>Depth: 61.0 cm (24.02 in)                               |
| <b>System weight</b> | 13.7 kg (30.2 lb) — with dual power supply, no SFP   |

### Environmentals

|                    |  |
|--------------------|--|
| <b>Temperature</b> | Operating: 0°C to 40°C (32°F to 104°F)<br>Non-operating: -25°C to 70°C (-13°F to 158°F)                        |
| <b>Humidity</b>    | Operating: 20% to 85% non-condensing at 40°C (104°F)   |
| <b>Altitude</b>    | Operating: Up to 3,000 m (9,800 ft)<br>Storage: Up to 12 km (32,200)   |
| <b>Shock</b>       | Operating: 20G, 6 ms half-sine<br>Non-operating: 15G, 12 to 18 ms trapezoid                                    |
| <b>Vibration</b>   | Operating: 0.5 g sine, 0.4 grms random, 5 to 500 Hz<br>Non-operating: 2.0 g sine, 1.1 grms random, 5 to 500 Hz |

### Airflow

|                        |        |
|------------------------|--------|
| <b>Max airflow</b>     | 74 CFM |
| <b>Nominal airflow</b> | 54 CFM |

### Power

|                                    |   |
|------------------------------------|---|
| <b>Maximum output</b>              | 300 Watts   |
| <b>System power consumption</b>    | Nominal system draw 175 Watts   |
| <b>Nominal input voltage</b>       | 90 to 264 VAC, 47 to 63 Hz  |
| <b>Input line frequency</b>        | 47 to 63 Hz   |
| <b>Minimum input voltage</b>       | 90 VAC  |
| <b>Maximum input voltage</b>       | 264 VAC   |
| <b>BTU rating (80% efficiency)</b> | 220 Watts / 0.8 X 3.412 BTU/hr/Watts = 756 BTU/hr                                     |
| <b>Inrush current</b>              | Maximum of 15 Amps for period between 10 to 150 ms at 50°C (122°F), hot or cold start |

The SilkWorm 4900 complies with the following safety certifications:

- UL 60950-1: 2003, First Edition (Underwriters Laboratories)
- CSA 60950-1-03 (Canadian Standards Association)
- Nemko EN60950:2000
- TUV EN60950:2000 / IEC60950:1999 (TUV "GS" for Germany, TUV "S" for Argentina)
- GOST (Russia)
- Low Voltage Directive (73/23/EEC) for CE Marking in European Union

For information about supported SAN standards, visit [www.brocade.com/sanstandards](http://www.brocade.com/sanstandards)



**Corporate Headquarters**  
San Jose, CA USA  
T: (408) 333-8000  
[info@brocade.com](mailto:info@brocade.com)

**European and Latin American Headquarters**  
Geneva, Switzerland  
T: +41 22 799 56 40  
[emea-info@brocade.com](mailto:emea-info@brocade.com)

**Asia Pacific Headquarters**  
Singapore  
T: +65-6538-4700  
[apac-info@brocade.com](mailto:apac-info@brocade.com)

© 2006 Brocade Communications Systems, Inc. All Rights Reserved. 03/06 GA-DS-781-01

Brocade, the Brocade B weave logo, Fabric OS, Secure Fabric OS, and SilkWorm are registered trademarks and Tapestry is a trademark of Brocade Communications Systems, Inc., in the United States and/or in other countries. All other brands, products, or service names are or may be trademarks or service marks of, and are used to identify, products or services of their respective owners.

Notice: This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered or to be offered by Brocade. Brocade reserves the right to make changes to this document at any time, without notice, and assumes no responsibility for its use. This informational document describes features that may not be currently available. Contact a Brocade sales office for information on feature and product availability. Export of technical data contained in this document may require an export license from the United States Government.